

Strobe Lights!

Linear strobes feature high-quality, long-life strobe lamps which are designed to reduce tungsten build-up for longer lamp maintenance cycles. Careful consideration is given to the relationship between lamp shade and lens design for maximum light output. The dry-electrolyte capacitor used runs cooler than those used in many competitive strobes, resulting in a more reliable product that won't fail due to overheating. The state-of-the-art strobe mechanism produces 2.2 joules of energy, while drawing relatively low level amperage. The strobe tube is rated for 7,000 hours.



Part Numbers

2510-335 - Red

2510-336 - Green

2510-337 - Amber

SPECIFICATIONS:

Lamp Life

7,000 hours

Lamp Style

Strobe

Operating Temperature

-31°F to 150°F

Net Weight

7.3 oz.

Shipping Weight

8.5 oz.

Diameter

3.125"

Height

5.7"

Voltage

12-48 VDC

Operating Current

0.44-0.10 amps

Flash Rate/Minute

65-95

Joule Output


2.2

Candlepower Peak

175,000

Candlepower ECP

51.5"

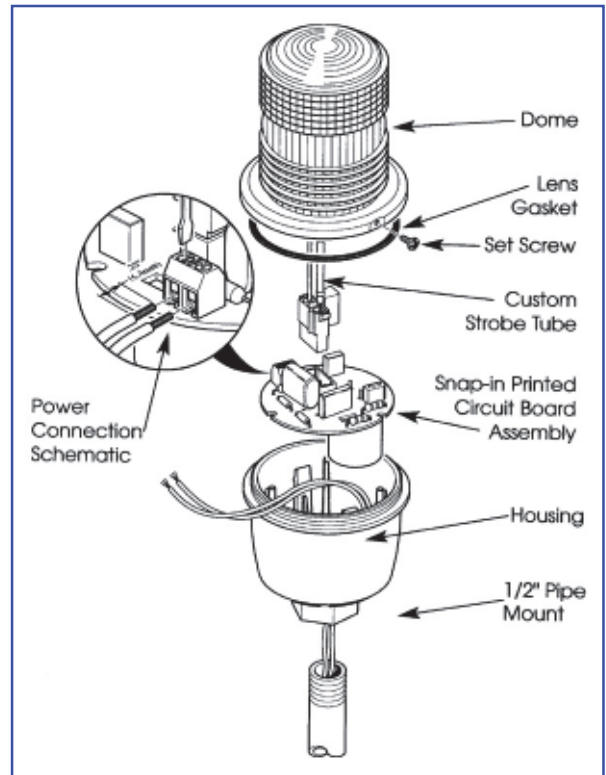

UL and cUL Listed
CSA Certified
CE Pending

Linear[®]
Building On Innovation.