



**Linear®**

# Swing Gate Operators

## SW Series



### SWC Commercial

- 1/2 or 1 HP continuous-duty PSC motor
- 115 VAC or 230 VAC single phase

### SWD Commercial/Residential

- DC-powered battery back-up with advanced soft start/soft stop motor control
- Full-time 1/2 HP DC motor
- Selectable fail-safe or fail-secure modes of operation
- Solar power capable

### SWR Residential

- 1/2 HP PSC motor
- 115 VAC or 230 VAC single phase

### Common Features

- Crank style
- Black UV Stabilized polyethylene cover
- Pad mount standard; post mount optional
- Exterior reset button
- UL325/UL991 compliant APeX controller
- Fully integrated radio receiver

## SW SERIES SWING GATE OPERATOR SPECIFICATIONS

	Model	HP	Voltage Single-Phase	Maximum Gate Length	Maximum Gate Weight	Open Speed	Max Cycles
SWC	SWC-2	1/2	115 / 230 V	17'	600 lbs	11-14 sec	Continuous
	SWC-1	1	115 / 230 V	19'	1000 lbs	11-14 sec	Continuous
SWD	SWD-211	1/2	115 V 24 VDC battery backup (solar charger optional)	18'	700 lbs	11-14 sec	Continuous
SWR	SWR-211	1/2	115 V	15'	500 lbs	11-14 sec	150/day
	SWR-211	1/2	230 V	15'	500 lbs	11-14 sec	150/day

# Features

## Electrical

- Integral entrapment sensing system with digital set point for quick accurate adjustment and enhanced safety
- Continuous tone entrapment alarm with reset button
- Integrated programmable warning beeper during gate movement
- LED diagnostic display for ease of setup and troubleshooting
- Selectable pre-start alarm with provision for ADA compliant visual pre-start and run alarm
- Regulated 24 Volt DC power available for access control accessories
- Integrated maximum run and auto close timer (0-9 minutes)
- Built-in networked dual gate capability using 3-wire shielded cable

## Mechanical

- Heavy-duty, zinc-plated, steel chassis
- Right-angle gear reducer
- 1" diameter output shaft
- Optional adjustable torque limiter
- Heavy-duty pillow block bearings
- Universal pad mount standard; optional post mount kit

### 1. Cam Operated Limits

- Easily accessible through access door

### 2. APeX Controller

- UL325/UL991 compliant 24 VDC control module
- Full featured for access control, security, and entrapment protection
- Integrated radio receiver, plug-in loop detector capability, surge protection, and easy to read labeling standard.

### 3. Steel Crank


- Easily removable
- Integrated manual disconnect

### 4. Heavy-Duty Components

- Gear reducer and pillow block bearing for smooth, reliable, quiet power transmission

### 5. Standard Convenience Features

- Exterior reset button
- Power on/off button
- Accessory power outlet on 115 V machines
- Integrated 3-button station

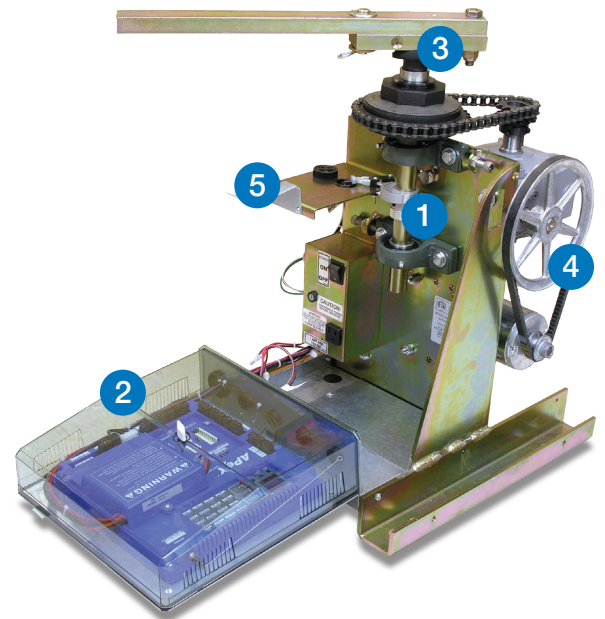

#### CAUTION

- Automatic gates not for pedestrians
- Automatic gate operators designed for vehicular traffic only; operators are powerful and can cause serious injury or death; DIRECT ALL PEDESTRIAN TRAFFIC TO SEPARATE PEDESTRIAN GATE
- UL325 requires use of contact or non-contact anti-entrapment devices
- ASTM F2200 requires that all exposed rollers are covered

**Linear**<sup>®</sup>